


DIGITAL CALIPERS WITH INTERCHANGEABLE BALL TIPS

DATA
OUTPUT



1527-3001

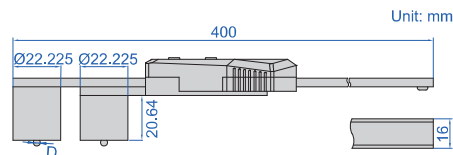

- Non waterproof
- Resolution 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: ball tips

With data interface (optional data output cable: code 7315-25 receiver is needed, 7302-21)


| Code | Range | Accuracy |
|-----------|-------------------|----------|
| 1527-3001 | (22.22+D) ~300mm* | ±0.03mm |

Built-in wireless
(receiver code 7315-2/3/6/7/8/9 is needed)

| Code | Range | Accuracy |
|-------------|-------------------|----------|
| 1527-3001WL | (22.22+D) ~300mm* | ±0.03mm |

*"D" is the diameter of ball tips.

Ball tips (optional, supplied in pair)



1527-T101

type A



1527-T104

type B

| Code | Diameter (D) | Accuracy of diameter | Type | Material |
|-----------|-------------------|----------------------|------|-----------------|
| 1527-T101 | 1/16" (Ø1.5875mm) | ±0.005mm | A | ruby |
| 1527-T102 | 1/8" (Ø3.175mm) | ±0.005mm | B | stainless steel |
| 1527-T103 | 3/16" (Ø4.7625mm) | ±0.005mm | B | stainless steel |
| 1527-T104 | 1/4" (Ø6.35mm) | ±0.005mm | B | stainless steel |
| 1527-T105 | 3/8" (Ø9.525mm) | ±0.005mm | B | stainless steel |
| 1527-T106 | 1/2" (Ø12.7mm) | ±0.005mm | B | stainless steel |