



VIDEO

DIGITAL INDICATORS FOR BORE GAUGES (WITH TRANSMISSION BUTTON AND SIGNAL LIGHT)

DATA
OUTPUT

THE ORIGINAL DATA
REMAINS AFTER POWER OFF

read the diameter directly,
after inputting the
size of setting ring.



MIN


the minimum value
tracking function can find
the diameter automatically.



press the button
to transmit data

data transmission
signal light


2108-10F

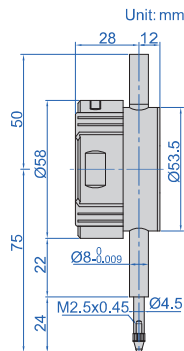

- Specially designed for bore gauges
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after inputting the size of setting ring
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, minimum value tracking, calibration, data preset, inch/metric conversion, data output
- Data remains after power off, no need to recalibrate after power on
- Automatic power off (time is adjustable)
- Power:
 - with data interface: CR2032
 - built-in wireless: rechargeable Li-battery
- Optional accessory: backs, contact points

analog pointer

analog pointer



With data interface (data output cable code 7315-51B need receiver, 7302-40M, 7305-40M, optional)

Code	Range	Resolution	Accuracy	Hysteresis	Cap	Remark
2108-10F *	12.7mm/0.5"	0.002mm/0.0001" (can switch to: 0.01mm/0.0005")	20μm	10μm	cannot lift	flat back
2108-101F *	12.7mm/0.5"	0.001mm/0.00005"	5μm	2μm	cannot lift	flat back

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required, optional)

Code	Range	Resolution	Accuracy	Hysteresis	Cap	Remark
2108-10FWL *	12.7mm/0.5"	0.002mm/0.0001" (can switch to: 0.01mm/0.0005")	20μm	10μm	cannot lift	flat back
2108-101FWL *	12.7mm/0.5"	0.001mm/0.00005"	5μm	2μm	cannot lift	flat back

* Supplied with manufacturer inspection certificate