


dial comparator
is optional

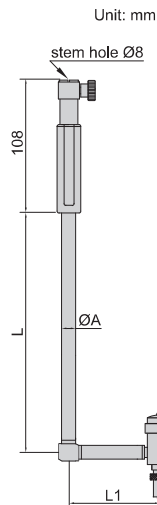

2443-150

- Carbide contact points
- Optional accessory:
 - Digital/dial indicator, dial comparator
 - Setting ring (code **6312**)
 - Long handle (code **7352**)
 - Bore gauge setter

							(mm)
Code	Range	Accuracy (without dial indicator)	Repeatability (without dial indicator)	ØA	L	L1	
2443-6*	4.5-6mm	4µm	1µm	4	80	30	
2443-8*	6-8mm	4µm	1µm	5	100	30	
2443-12*	8-12mm	4µm	1µm	5	100	30	
2443-20*	12-20mm	4µm	1µm	8	110	52	
2443-35*	18-35mm	4µm	1µm	8	110	52	
2443-60*	35-60mm	4µm	1µm	12	177	62	
2443-100*	50-100mm	4µm	1µm	12	177	62	
2443-150*	50-150mm	4µm	1µm	12	177	62	
2443-160*	100-160mm	4µm	1µm	18	234	75	
2443-230*	100-230mm	4µm	1µm	18	234	75	
2443-290*	160-290mm	4µm	1µm	18	234	75	
2443-360*	160-360mm	4µm	1µm	18	234	75	
2443-410*	280-410mm	5µm	2.5µm	24	400	80	
2443-510*	280-510mm	5µm	2.5µm	24	400	80	
2443-800*	400-800mm	5µm	2.5µm	24	400	80	

* Supplied with manufacturer inspection certificate