




DIGITAL DISK MICROMETERS/SNAP GAUGES

DATA
OUTPUTNON-ROTATING
SPINDLEONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS 3MMABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFFMEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVEATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKINGIP65
WATERPROOFINSPECTION
CERTIFICATE


3353-25

- Measure root tangent length of gear
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
- 0.001mm/0.00005"
- 0.01mm/0.0005"
- One turn of sleeve makes 5mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
- Customizable measuring force range 2-12N
- Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gauge blocks for zero setting
- Power: rechargeable battery, for 24 hours continuous working

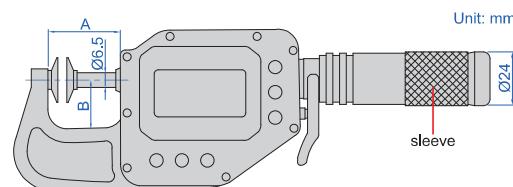

With data interface (optional wireless transmitter code 7315-3350, receiver is needed page 9)

| Code | Range | Accuracy | Repeatability | Parallelism | A | B |
|------------|------------------|----------|---------------|-------------|-------|------|
| 3353-25 * | 0-25mm/0-1" | 4µm | 1µm | 4µm | 38mm | 24mm |
| 3353-50 * | 25-50mm/1-2" | 4µm | 1µm | 4µm | 63mm | 25mm |
| 3353-75 * | 50-75mm/2-3" | 5µm | 1µm | 5µm | 88mm | 42mm |
| 3353-100 * | 75-100mm/3-3.95" | 5µm | 1µm | 5µm | 113mm | 56mm |

alarm when
over tolerance

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

| Code | Range | Accuracy | Repeatability | Parallelism | A | B |
|--------------|------------------|----------|---------------|-------------|-------|------|
| 3353-25AWL* | 0-25mm/0-1" | 4µm | 1µm | 4µm | 38mm | 24mm |
| 3353-50AWL* | 25-50mm/1-2" | 4µm | 1µm | 4µm | 63mm | 25mm |
| 3353-75AWL* | 50-75mm/2-3" | 5µm | 1µm | 5µm | 88mm | 42mm |
| 3353-100AWL* | 75-100mm/3-3.95" | 5µm | 1µm | 5µm | 113mm | 56mm |

* Supplied with manufacturer inspection certificate