

CUSTOM-MADE

OTHER CLASSES ARE AVAILABLE, SUCH AS H8, H9
OTHER DIAMETERS ARE AVAILABLE, SUCH AS 19.003mm
OTHER LENGTHS ARE AVAILABLE, SUCH AS 200mm

- Standard ISO1938-1
- Supplied with Go and No-Go gauges together
- Hardness HRC 60±2
- Plug gauge with handle diameter smaller than both ends, used for measuring deep hole


H7

Code	Diameter	L (mm)	L1(mm)	L2 (mm)	Ød(mm)
4225-3	3	110	20	20	2
4225-4	4	110	20	20	3
4225-5	5	110	20	20	3
4225-6	6	110	20	20	5
4225-7	7	110	20	20	5
4225-8	8	110	20	20	5
4225-9	9	110	20	20	5
4225-10	10	120	20	20	8
4225-11	11	120	20	20	8
4225-12	12	120	20	20	8
4225-13	13	120	20	20	8
4225-14	14	120	20	20	8
4225-15	15	120	20	20	8
4225-16	16	140	25	25	10
4225-17	17	140	25	25	10
4225-18	18	140	25	25	10
4225-19	19	140	25	25	10
4225-20	20	140	25	25	10

PLAIN PLUG GAUGES THIN HANDLE



4225-16

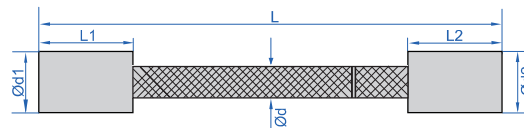

Size tolerance of H7

(mm)

Diameter Ød	Size tolerance of Go gage (µm)	Size tolerance of No-Go gage (µm)
≤3	+0.5/+2.5	+9/+11
>3, ≤6	+0.75/+3.25	+10.75/+13.25
>6, ≤10	+0.75/+3.25	+13.75/+16.25
>10, ≤18	+1/+4	+16.5/+19.5
>18, ≤30	+1/+5	+19/+23