


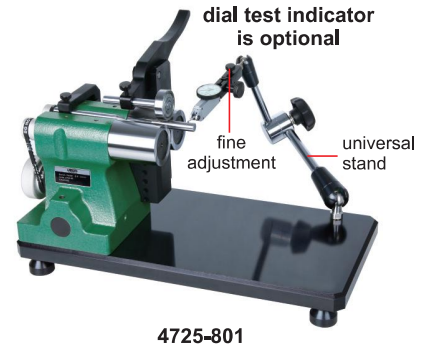
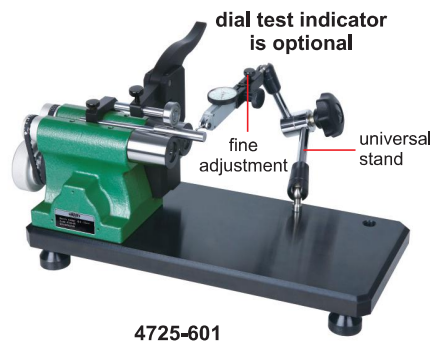
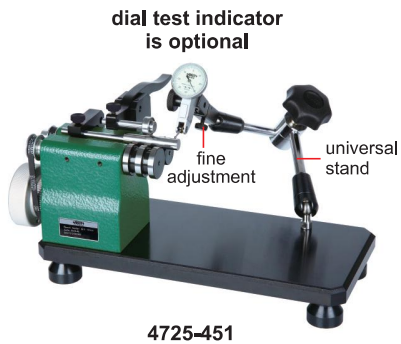
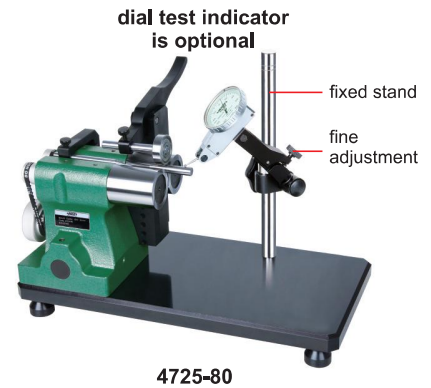
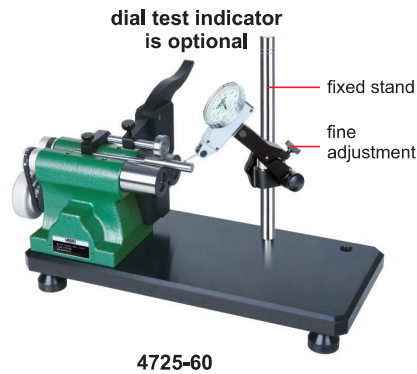
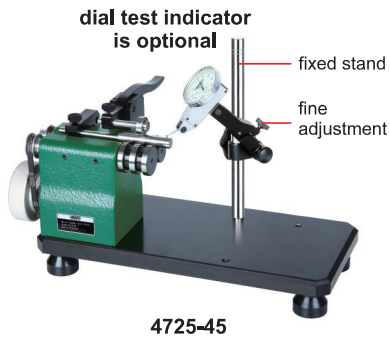
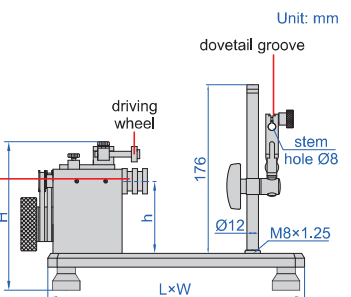




CONCENTRICITY GAUGES

HIGH STABILITY,
LONG WORKING LIFE



to ensure the accuracy 2 μ m, the distance between measuring point and roller should be <30mm



- With ball bearing, high stability, long working life
- Accuracy: 2 μ m
- Optional accessory: dial test indicator

Code	Diameter range	Center height (h)	L×W×H	Weight	Remark
4725-45	Ø3-45mm	80mm	280×130×170mm	6kg	fixed stand, good rigidity
4725-60	Ø8-60mm	90mm	350×160×190mm	15.6kg	fixed stand, good rigidity
4725-80	Ø8-80mm	130mm	400×200×250mm	25kg	fixed stand, good rigidity
4725-451	Ø3-45mm	80mm	280×130×170mm	6kg	universal stand, convenient operation
4725-601	Ø8-60mm	90mm	350×160×190mm	15.6kg	universal stand, convenient operation
4725-801	Ø8-80mm	130mm	400×200×250mm	25kg	universal stand, convenient operation