


BENCH CENTERS


rotary centers
(optional) code:
6392-MT2/MT3/MT4



umbrella centers
(optional) code:
6391-MT2/MT3

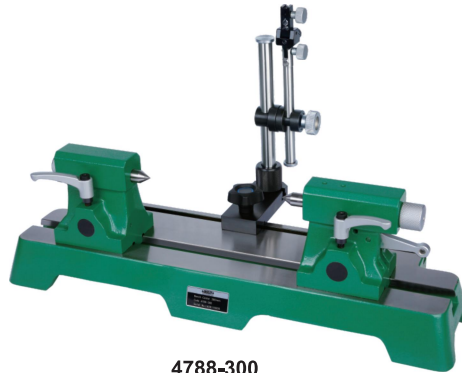

4788-300

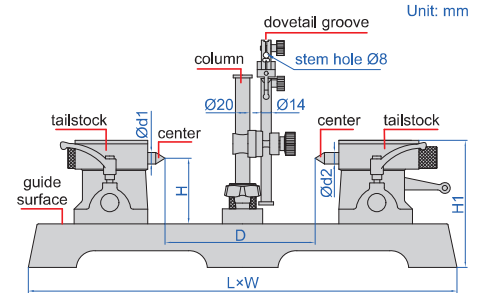

- Movable column
- Optional accessory: centers (only for high accuracy series)

High accuracy

(mm)

Code	Parallelism*	Runout accuracy	Center height (H)	Distance between two centers (D)	L	W	H1	Diameter of center (Ød1=Ød2)	Taper of center	Weight	Load
4788-300	0.010mm	2µm	90	300	590	192	175	18.0	MT2	34kg	25kg
4788-400	0.010mm	2µm	130	400	770	206	241	24.1	MT3	66kg	60kg
4788-600	0.010mm	2µm	130	600	930	220	250	24.1	MT3	90kg	60kg
4788-600H2	0.010mm	2µm	200	600	930	220	325	24.1	MT3	105kg	60kg
4788-1000	0.010mm	3µm	130	1000	1330	220	262	24.1	MT3	112kg	60kg
4788-1000H2	0.010mm	3µm	200	1000	1330	220	337	24.1	MT3	125kg	85kg
4788-1000H3	0.010mm	3µm	300	1000	1330	220	442	31.6	MT4	165kg	85kg

Standard accuracy

(mm)

Code	Parallelism*	Runout accuracy	Center height (H)	Distance between two centers (D)	L	W	H1	Diameter of center (Ød1/Ød2)	Weight	Load
4788-D2	0.010mm	3µm	90	200	490	180	175	18/25	27kg	25kg
4788-D3	0.010mm	3µm	90	300	590	195	175	18/25	36kg	25kg
4788-D4	0.012mm	3µm	130	400	730	205	241	30/30	68kg	60kg
4788-D6	0.015mm	3µm	130	600	930	220	250	30/30	91kg	60kg
4788-D8	0.015mm	3µm	130	800	1130	220	250	30/30	99kg	60kg
4788-D10	0.015mm	3µm	130	1000	1330	220	262	30/30	116kg	60kg

*Parallelism of two centers to the guide surface