


## PORTABLE TEMPERATURE DRY BLOCK CALIBRATORS (HIGH TEMPERATURE TYPE)

- Used for temperature calibration in industrial or laboratory
- Multi-point temperature correction function
- Segmented PID control, one-button heating, full-automatic temperature control
- RS232 communication interface is included

soaking block (included), can be customized

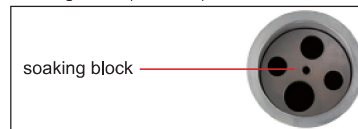

CTB-TS1200

### STANDARD DELIVERY

Main unit	1 pc
Soaking block	1 pc

### SPECIFICATION

Code	CTB-TS800	CTB-TS1000	CTB-TS1200
Temperature range	300°C~800°C	300°C~1000°C	300°C~1200°C
Temperature resolution	0.1°C		
Temperature fluctuation	±0.5°C		
Radial uniformity	±1.0°C		
Soaking block	insertion aperture: Ø6.5mm, Ø6.5mm, Ø8mm, Ø10mm can be customized		
Hole insertion depth	155mm		
Control method	4.2" touch screen		
Operating environment	temperature: 22°C±3°C, humidity: 15%RH~65%RH		
Power	2000W	2200W	2300W
Power supply	AC220V, 50/60Hz, 16A		
Dimension (L×W×H)	350×190×385mm		
Net weight	11kg		