


ATTENTION: NOT SUITABLE FOR HIGH SPEED SHOCK TORQUE MEASUREMENT



DIGITAL TORQUE TESTERS

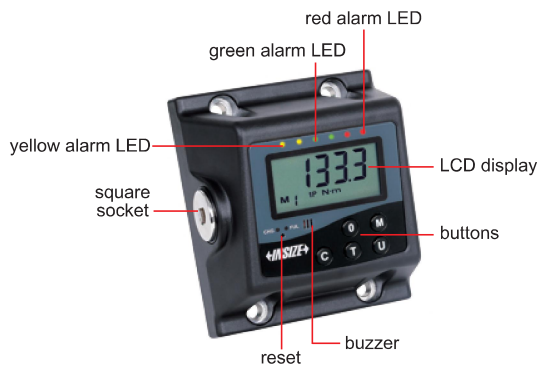

IST-04TT350
type A



IST-04TT815
type B

- Test torque wrenches, torque screwdrivers and other torque tools
- Clockwise operation
- Peak, track and first peak working modes
- Tolerance testing
- LED indicator for target torque alarm:
 - Yellow LED light on when the value is below the low tolerance;
 - green LED light on when the value is within tolerance;
 - red LED light on when the value is above the high tolerance
 - The buzzer alarms when the maximum torque value is captured in the first peak mode
- Ability to upload data in real time, save data and export data to EXCEL
- Power off automatically in 2 minutes without any operations
- Supplied with manufacturer inspection certificate

Database File		Tester Connected				
d:\Documents\ittreader.db		#	Date Time	Tag	Measured	Unit Result
Tag:		30	2024-08-15 15:06:56		0.8495	N.m LO
Query		31	2024-08-15 15:06:58		1.0179	N.m OK
From: 2024/08/15 00:00		32	2024-08-15 15:07:00		0.9584	N.m OK
To: 2024/08/15 23:59		33	2024-08-15 15:07:02		0.965	N.m OK
Tag:		34	2024-08-15 15:07:06		1.0158	N.m OK
Inquiry		35	2024-08-15 15:07:08		1.0387	N.m OK
Export Excel		36	2024-08-15 15:07:09		1.0155	N.m OK
Language: English		37	2024-08-15 15:07:11		0.9452	N.m OK
		38	2024-08-15 15:07:13		0.9374	N.m OK
		39	2024-08-15 15:07:15		0.7303	N.m LO
		40	2024-08-15 15:07:17		0.8686	N.m LO
		41	2024-08-15 15:07:19		1.0156	N.m OK
		42	2024-08-15 15:07:21		0.9697	N.m OK
		43	2024-08-15 15:07:23		0.9102	N.m OK
		44	2024-08-15 15:07:25		1.0095	N.m OK
		45	2024-08-15 15:07:27		1.0538	N.m OK
		46	2024-08-15 15:07:30		1.1725	N.m HI

software (included)




adaptor
(type A included)

STANDARD DELIVERY

Main unit	1 pc
Transmission cable and software	1 pc
AC/DC adaptor	1 pc
Adaptor	refer to details

SPECIFICATION

Code	IST-04TT5	IST-04TT28	IST-04TT68	IST-04TT350	IST-04TT815	IST-04TT1000	IST-04TT2000
Type	A				B		
Range	0.5~5N.m	2.8~28N.m	6.8~68N.m	35~350N.m	81.5~815N.m	100~1000N.m	200~2000N.m
Accuracy	±1% of indicated value (clockwise)						
Resolution	0.001N.m	0.01N.m	0.01N.m	0.1N.m	0.1N.m	1N.m	1N.m
Unit	N.m, in.lb, ft.lb, kg.cm				N.m, ft.lb		
Square socket/hex driver	1/4"	3/8"	3/8"	1/2"	27mm	27mm	27mm
Adaptor	no	3/8" to 1/4"	3/8" to 1/4"	1/2" to 3/8" 3/8" to 1/4"	no		
Power supply	AC 100~240V, 50/60Hz						
Weight	0.75kg	0.75kg	1.1kg	1.1kg	5.1kg	5.1kg	5.1kg

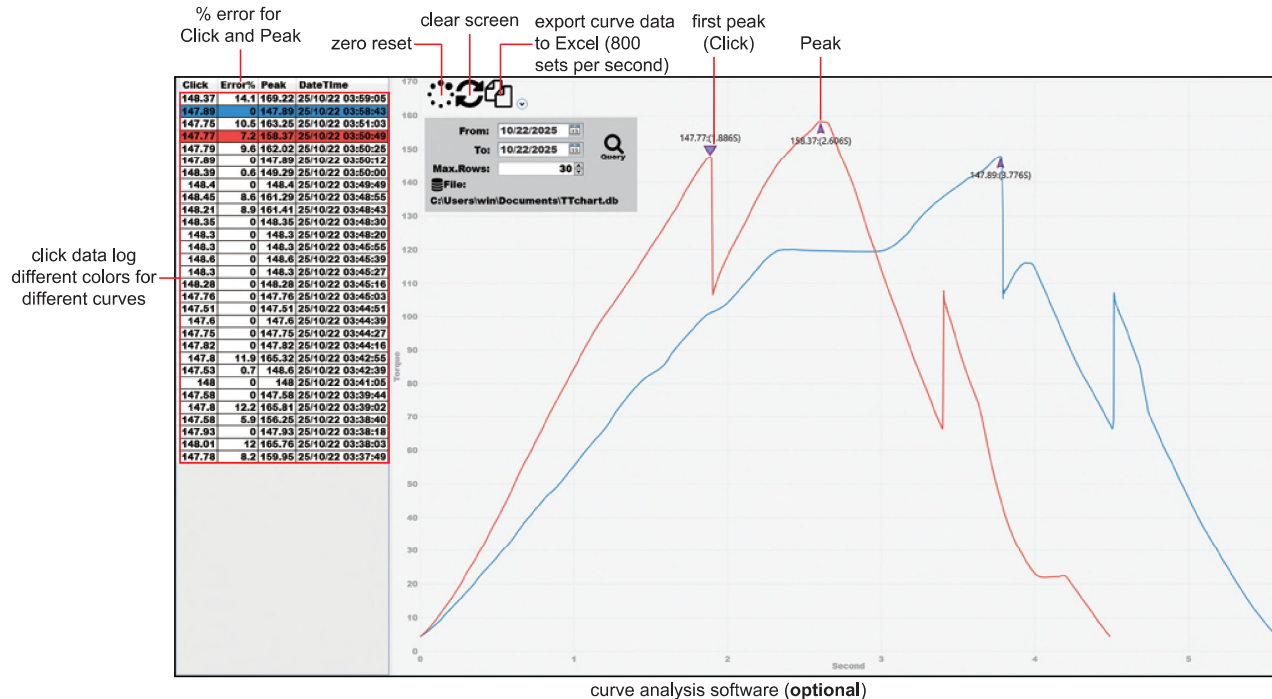

- Over-torque analysis when Click signal is insufficient
- Real-time data tracking and recording

OPTIONAL ACCESSORY

Curve analysis software

IST-TT-CURVE