

WIRED TRANSMISSION DIGITAL TORQUE SCREWDRIVERS (KEYBOARD SIGNAL)



hex screwdriver bit
(included)




phillips screwdriver bit
(included)

Torque screwdriver:

- Clockwise and counter-clockwise operation
- Peak and track working mode
- Upper and lower tolerance limits can be set and measurement results automatically calculate % difference from target value
- 10 preset target torque values and usage modes, parameters can be locked to prevent change
- With audible and visible alarm:
 - Green LED light on and buzzer sounds intermittent when target torque value is 90%~100% of target torque
 - Red and green LED lights on and buzzer sounds long-lasting when target torque value is reached
- Counting function, over 20% of the range counts once
- Auto power off time can be set
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

Data transmission:

- Keyboard signal through a cable, can be transmitted to Excel, Word, Txt, etc
- Measurement results can be sent manually by pressing the M button or sent automatically after measurement

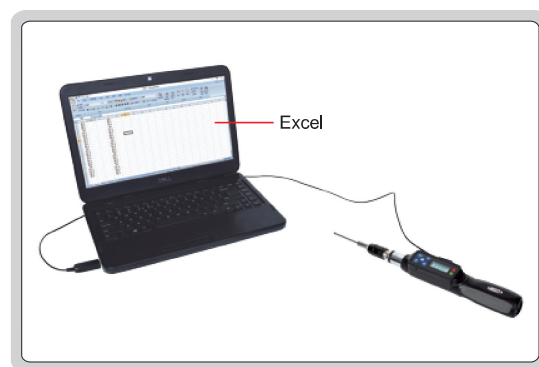

transmission cable (optional)
keyboard signal output via transmission cable

SPECIFICATION

Code	IST-2SD50	IST-2SD200	IST-2SD400	IST-2SD600	IST-2SD50NM	IST-2SD200NM	IST-2SD400NM	IST-2SD600NM
Torque range	10~50cN.m	40~200cN.m	80~400cN.m	120~600cN.m	0.1~0.5N.m	0.4~2N.m	0.8~4N.m	1.2~6N.m
Torque unit	cN.m, in.lb, kg.cm				N.m, in.lb, ft.lb, kg.cm			
Accuracy	clockwise: ±2%; counter-clock wise: ±3%							
Resolution	0.1cN.m, 0.01in.lb, 0.01kg.cm				0.001N.m, 0.01in.lb, 0.001ft.lb, 0.01kg.cm			
Size of hex socket (L)	1/4"							
Power supply	1×AAA battery							
Length	203mm							
Net weight	190g							

STANDARD DELIVERY

Torque screwdriver	1 pc
Phillips screwdriver bit	1 pc
Hex screwdriver bit	1 pc

OPTIONAL ACCESSORY

Calibration cable	IST-SD-CABLE
Transmission cable	IST-HID-CABLE