
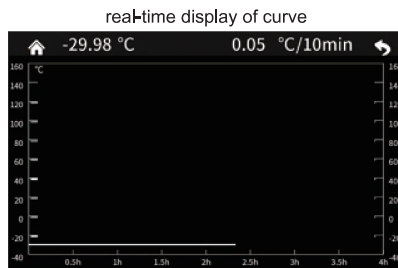


PORTABLE TEMPERATURE DRY BLOCK CALIBRATOR (LOW TEMPERATURE TYPE) CODE LTB-TS30

- Used for temperature calibration in industrial or laboratory
- Unit: °C, °F
- Language: English, Chinese
- Overheat protection
- Multi-point temperature correction function
- Segmented PID control, one-button heating and cooling, full-automatic temperature control
- Refrigeration mode: thermoelectric cooling

soaking block (included), can be customized

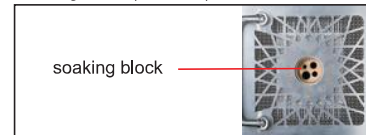

SPECIFICATION

Temperature range	-30°C~150°C
Temperature resolution	0.01°C
Temperature fluctuation	±0.15°C
Radial uniformity	±0.2°C
Soaking block	insertion aperture: Ø4.5mm, Ø6.5mm, Ø8mm, Ø10mm can be customized
Depth	well depth: 160mm, hole depth: 155mm
Control method	touch screen
Power	450W
Power supply	220V/50Hz
Dimension (L×W×H)	320×170×330mm
Net weight	9kg

STANDARD DELIVERY

Main unit	1 pc
Soaking block	1 pc