

- IP54 dust/waterproof (when cap is lifted, no dust/waterproof)
- Color display, large characters with backlight
- Absolute encoder, the original data remains after power off
- Automatic power off
- Display can be rotated by 270°
- Adjustable resolution: 0.0005mm/0.00002" 0.001mm/0.00005"
- Button function: on/off, zero setting, data preset, tolerance Go and No-Go display,data hold, mm/inch, measuring direction change, blue tooth, max./min./TIR, adjust resolution, absolute/incremental measurement, data output
- Android and iPhone APP, USB type-C cable are included
- Power: rechargeable Li-battery, for 30 hours continuous working (bluetooth transmission reduce working hours)



M2.5x0.45




Code	Range	Accuracy	Hysteresis	Maximum measuring force	сар	Remark
2135-10*	12.7mm/0.5"	2µm	1.5µm	1.5N	can lift	flat back
2135 <b>-</b> 25*	25.4mm/1"	2µm	1.5µm	1.8N	can lift	flat back
2135-50*	50.8mm/2"	4µm	2µm	2.3N	can lift	flat back

<sup>\*</sup>Supplied with manufacturer inspection certificate

## Data output

Data output with bluetooth	keyboard format	data can be transmitted to Excel, Word, txt, etc.	single or continuous transmission (the fastest data output is 15pcs per 10s)	
(transmission distance is 10 meters)	virtual com port	data can be transmitted to Android and iPhone APP	real-time display (continuous transmission) or single transmission	
Data output with USB cable (cable length 1.8 meters)	keyboard format	data can be transmitted to Excel, Word, txt, etc.	single or continuous transmission (the fastest data output is 40pcs per 10s)	
(buble length no meters)	virtual com port and 485 data output can be customized			

## Date output with bluetooth and USB cable (include)

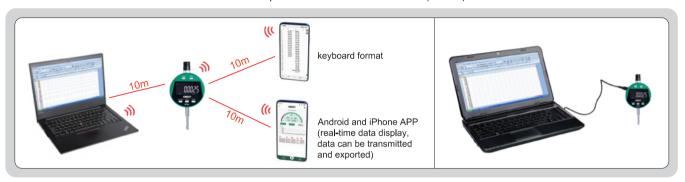

Android and iPhone APP (included), can choose real-time display (continuous transmission) or single transmission

