

## **BLUETOOTH DIGITAL INDICATING SNAP GAUGES**






ATTENTION: SETTING
STANDARDS ARE NOT INCLUDED

Unit: mm



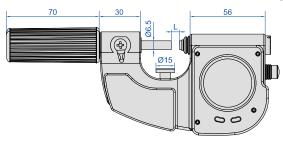

3509-25

warning in red or yellow when over tolerance


- Absolute encoder, the original data remains after power off
- Measuring stroke of anvil: 1mm
- Reading in digital and analog
- Button function: on/off, zero setting, mm/inch, tolerance, display setting, bluetooth, signal mode setting, data output
- Android and iPhone APP, USB type-C cable are included
- Carbide measuring faces
- Power: rechargeable Li-battery, for 20 hours continuous working (bluetooth transmission reduce working hours)
- Optional accessory: gage blocks grade 0 (4101-A series), for zero setting

	a BB 135	2 TO, mm 2 TO, 200 TO,				
over lower tolerance in yellow	within tolerance in green	over upper tolerance in red				

Code	Range (L)	Resolution	Accuracy	Repeatability
3509-25	0-25mm/0-1"	0.0001mm/.000005"	1µm	0.3µm
3509-50	25-50mm/1-2"	0.0001mm/.000005"	1µm	0.3µm

## Data output

Data output with bluetooth (transmission distance is 10 meters)	keyboard format	data can be transmitted to Excel, Word, txt, etc.	single transmission	
	virtua <b>l</b> com port	data can be transmitted to Android and iPhone APP	real-time display, data can be transmitted and exported	
Data output with USB cable (cable length 1.8 meters)	keyboard format	data can be transmitted to Excel, Word, txt, etc.	single transmission	
	virtua <b>l</b> com port	data can be transmitted to serial communication software	single transmission	

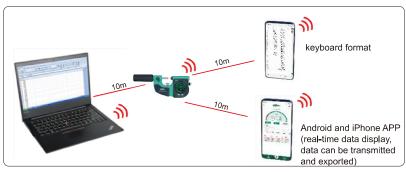



date output with bluetooth (included)

## data collection application (included) real-time display (continuous streaming) or single acquisition mode selectable

