

CONCENTRICITY GAGE WITH STRAIGHTNESS MEASUREMENT




- Maximum moving range of sliding table: 120mm
- Optional accessory: dial test indicators

to ensure the accuracy 2µm, the distance between measuring point and roller should be <30mm



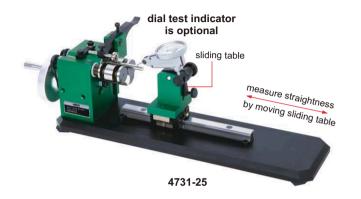



| Code | Diameter range | Workpiece length | Roller concentricity accuracy | Straightness measurement accuracy | Center height (h) | L×W×H | Weight |
|---------|----------------|---------------------|-------------------------------|--------------------------------------|----------------------|--------------|--------|
| 4731-25 | Ø1-25mm | 15-80mm | 2µm | 0.01mm | 70mm | 350×98×118mm | 5.3kg |