


INTELLIGENT ELECTRIC SCREWDRIVERS




Features

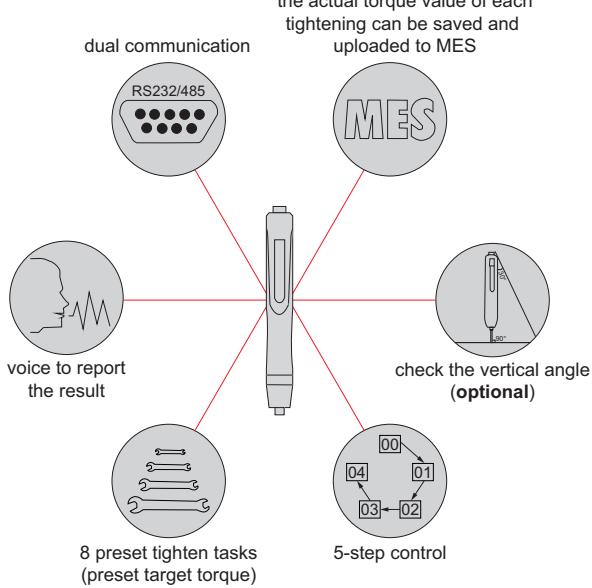

- Unit: kfg.cm, N.m, mN.m, kgf.cm, lbf.in
- Up to 8 preset values can form a task link
- Clockwise and counter-clockwise operation
- Non-slip grip handle
- Built-in overload protection function
- 50000 sets of data can be stored for 7 days

Operation system on control box (included)

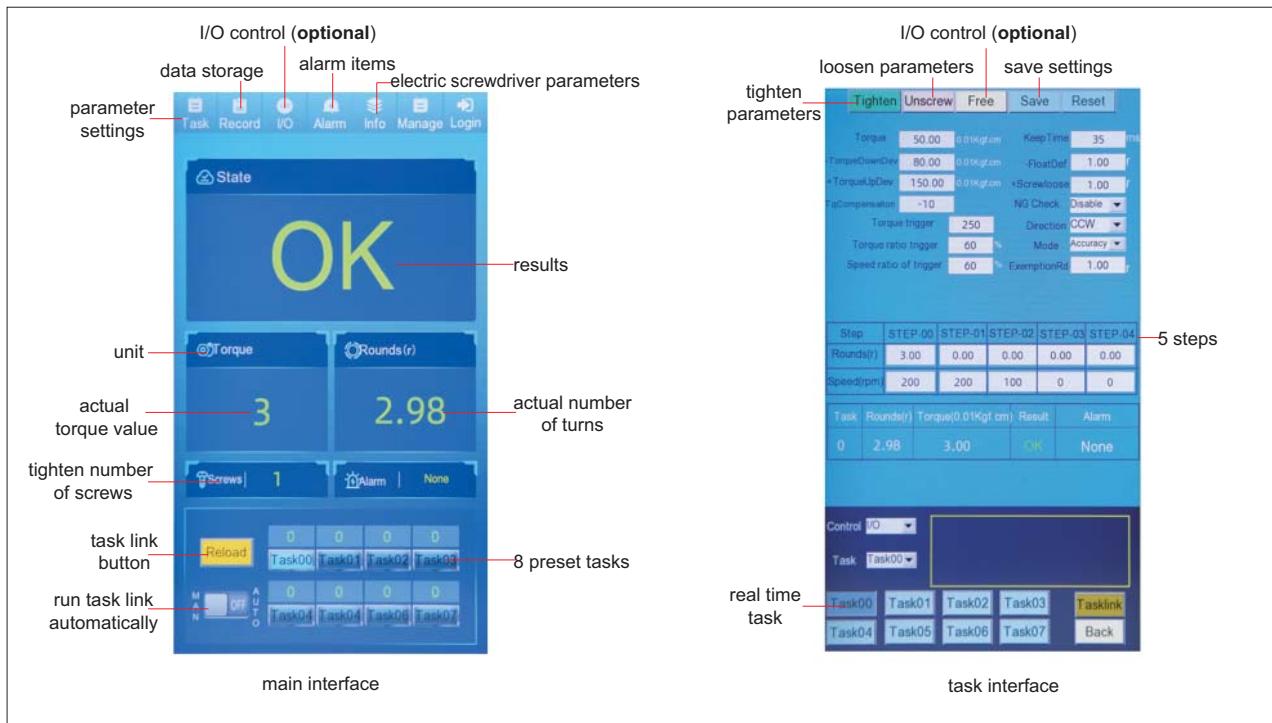

SPECIFICATION

Code	HES-H022	HES-H055	HES-H107	HES-H317	HES-H525	HES-H735	HES-H860
Type	A		B				
Range	0.2~1.5kgf.cm 0.02~0.15N.m	0.5~5kgf.cm 0.05~0.5N.m	1~7kgf.cm 0.1~0.7N.m	3~17kgf.cm 0.3~1.7N.m	5~25kgf.cm 0.5~2.5N.m	7~35kgf.cm 0.7~3.5N.m	8~60kgf.cm 0.8~6.0N.m
Accuracy	±5%		±5%				
Speed	30~2000rpm	30~1000rpm	30~2000rpm	30~1000rpm	30~1500rpm	30~600rpm	
Bits model	Ø4mm tail deficient screwdriver head		1/4" hex socket				
Dimension	electric screwdriver	30×42×204mm		50×45×245mm			
	control box	147×60×201mm		147×60×201mm			
Weight	electric screwdriver	250g		660g			
	control box	1280g		1280g			
Power	AC 220V		AC 220V				

STANDARD DELIVERY

Electric screwdriver (with bits and connection cable)	1pc
Control box	1pc
AC adapter	1pc
Software and USB disk	1pc
RS232 connection cable	1pc

OPTIONAL ACCESSORY

RS232 connection cable	HES-H-CABLE-232
RS485 connection cable	HES-H-CABLE-485
Ø4mm tail deficient screwdriver head	HES-H-BITS-A
1/4" hex socket	HES-H-BITS-B
Vertical angle detection function	HES-H-SOFT-C
QR code scanner	HES-H-S
Mechanical arm	HES-H-X