



ALUMINUM ALLOY TORQUE WRENCHES



- Unique ratchet design for easy adjustment of torque application position (**IST-39WM3000** is not included)
- Dual-drive head design enables counter-clockwise operation by flipping the wrench (**IST-39WM3000** is not included)
- Integrated aluminum alloy design, lightweight and sturdy
- Whether using with your both hands or extended handles, you can accurately achieve the preset torque value without torque deviation

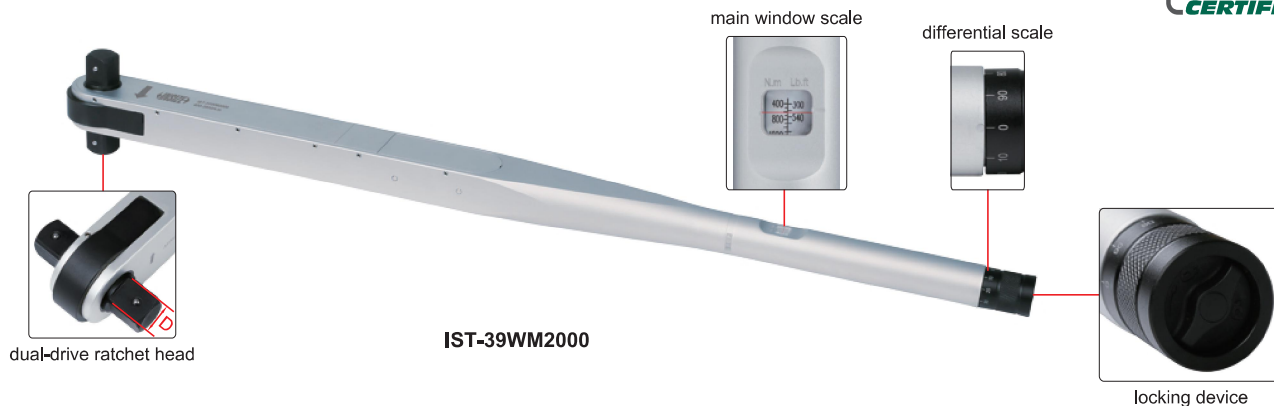

extended handle (**IST-39WM1000**, **IST-39WM1500**, **IST-39WM2000**, **IST-39WM3000** included)

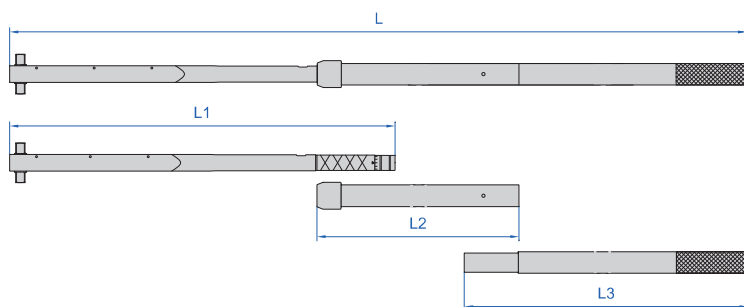

1 1/2" ratchet head (optional)



application

SPECIFICATION

Code	IST-39WM550	IST-39WM760	IST-39WM1000	IST-39WM1500	IST-39WM2000	IST-39WM3000 *
Range	100~550N.m	160~760N.m	200~1000N.m	300~1500N.m	400~2000N.m	600~3000N.m
Accuracy	±4%		±5%			
Graduation	2.5N.m	3N.m	5N.m	5N.m	10N.m	15N.m
Square driver (D)	3/4"	3/4"	3/4"	1"	1"	1 1/2"
Extended handle	—	—	1 pcs	1 pcs	2 pcs	2 pcs
Length (L1)	—	—	811mm	935mm	935mm	1040mm
Length (L2)	—	—	—	—	930mm	930mm
Length (L3)	—	—	754mm	930mm	930mm	930mm
Total length (L)	811mm	811mm	1400mm	1603mm	2313mm	2418mm
Weight	2900g	3200g	6600g	10400g	14500g	17700g

* Fixed head design, optional ratchet square head

OPTIONAL ACCESSORY

1 1/2" ratchet head	IST-39WM-RS (only suitable for IST-39WM3000)
---------------------	---