

# COLOR SCREEN MULTIFUNCTIONAL DIGITAL TORQUE WRENCHES





DATA  
OUTPUT

RANGE 6~340N.m OPTIONAL ACCURACY:  
CLOCKWISE:  $\pm 1\%$ , COUNTER-CLOCKWISE:  $\pm 2\%$



IST-40W200A

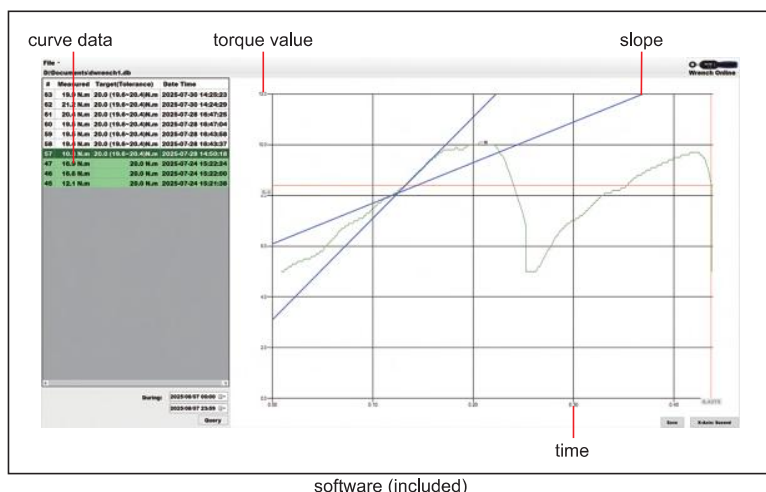

## Torque wrench:

- Clockwise and counter-clockwise operation
- Maximum value and real-time value displayed simultaneously
- Three display modes for torque values: pointer, numerical, and curve
- Upper and lower tolerance limits can be set to determine pass or fail by LED lights
- 9 preset target torque values
- With audible and visible alarm:
  - Green LED light on in sequence and buzzer sounds louder and louder when torque value is 80%~99.5% of target torque
  - Both green and red LED light on and buzzer sounds long-lasting alarm when torque value is over 99.5% of target torque
- Functions are presented in diagram form for users to select
- Auto power off time can be set
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

## Memory and data transmission:

- The data is stored in the wrench when the wrench is disconnected, and the data is automatically uploaded to computer after transmission cable is connected to the software
- Real-time uploading of data when transmission cable is connected to the software
- The data in the software can be exported to Excel
- View the slope of curve and drag the slope to compare it

## STANDARD DELIVERY

Digital torque wrench	1 pc
USB transmission cable and software	1 set

## SPECIFICATION

Code	Range	Accuracy	Resolution	Unit	Square driver (L)	Power supply	Length	Weight
IST-40W30A	6~30N.m	clockwise: $\pm 2\%$ counter-clock wise: $\pm 3\%$	0.01N.m	N.m in.lb ft.lb kg.cm	1/4"	rechargeable lithium battery	345mm	940g
IST-40W60A	12~60N.m		0.01N.m		3/8"		388mm	1060g
IST-40W135A	27~135N.m		0.1N.m		3/8"		417mm	1130g
IST-40W200A	40~200N.m		0.1N.m		1/2"		535mm	1460g
IST-40W340A	68~340N.m		0.1N.m		1/2"		655mm	1780g