


UNIVERSAL CALIPER



DATA
OUTPUT



1125-600

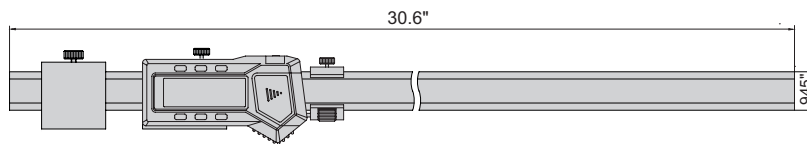




- Buttons: on/off, set, inch/mm, ABS, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable (part no. 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)





Part No.	Range*	Resolution	Accuracy
1125-600	0-24"/0-600mm	.0005"/0.01mm	±.002"

*The range will change according to different points

Half disk points (included)

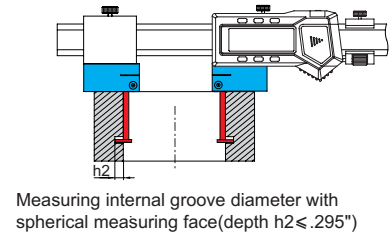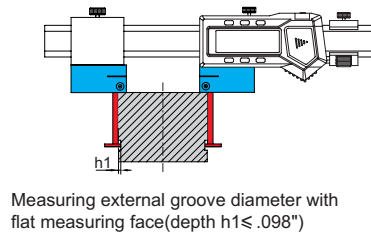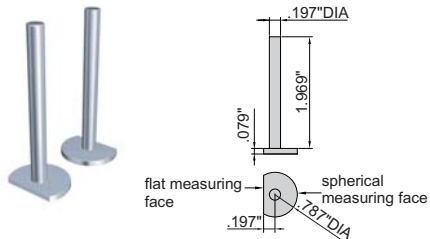


Conical points (optional)

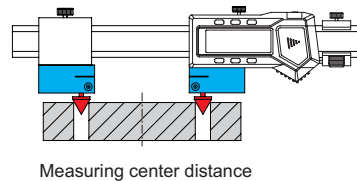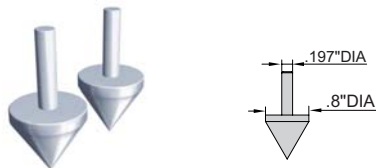

Part No.
1125-T101-1

Round shoulder points (optional)


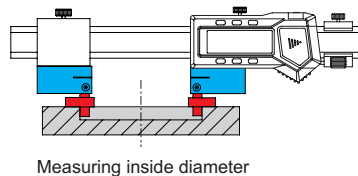


Part No.
1125-T102

To be continued

Continued from previous page



Flat shoulder points (optional)

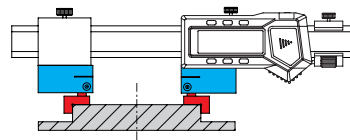

Measuring outside diameter

Part No.
1125-T103


Spherical points (included)

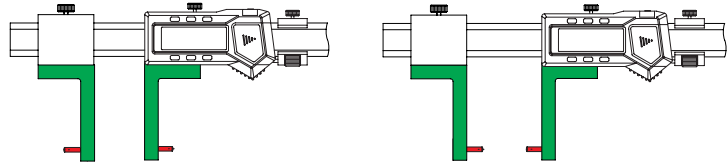


Multifunctional points (optional)




7392-T1





7392-T4




7392-T7




7392-T2




7392-T5




7392-T8




7392-T3



7392-T6



7392-T9




Part No.	Type
7392-T1	flat
7392-T2	spherical
7392-T3	spline
7392-T4	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7	point
7392-T8*	knife-edge
7392-T9	point

* It is necessary to use point sleeve (code 1125-T104) for these points

Ball points (optional)



7391-T5




Part No.	Ball dia.(D)
7391-T1	SØ1mm
7391-T2	SØ1.5mm
7391-T3	SØ2.0mm
7391-T4	SØ2.5mm
7391-T5	SØ3.0mm
7391-T6	SØ3.5mm
7391-T7	SØ4.0mm
7391-T8	SØ4.5mm
7391-T9	SØ5.0mm
7391-T10	SØ6.0mm
7391-TS	10 pairs/set, including all above points


Screw thread points (optional)



7321-T16



7381-T11



internal thread (60° thread angle)

Part No.	Pitch
7321-T11*	64-48TPI/0.4-0.5mm
7321-T12*	44-28TPI/0.6-0.9mm
7321-T13*	24-14TPI/1-1.75mm
7321-T14*	13-9TPI/2-3mm
7321-T15*	8-5TPI/3.5-5mm
7321-T16*	4.5-3.5TPI/5.5-7mm
7321-T1S*	6 pairs/set, including all above points

external thread (60° thread angle)



Part No.	Pitch
7381-T11*	64-48TPI/0.4-0.5mm
7381-T12*	44-28TPI/0.6-0.9mm
7381-T13*	24-14TPI/1-1.75mm
7381-T14*	13-9TPI/2-3mm
7381-T15*	8-5TPI/3.5-5mm
7381-T16*	4.5-3.5TPI/5.5-7mm
7381-TS*	6 pairs/set, including all above points

* It is necessary to use point sleeve (code 1125-T104) for these points

To be continued

Continued from previous page



Point sleeve (optional)

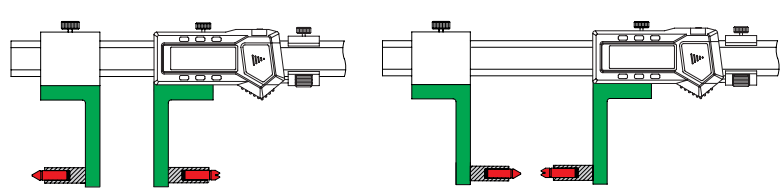



Part No.
1125-T104

Working with multifunctional points, ball points and screw thread points

Stands (included)

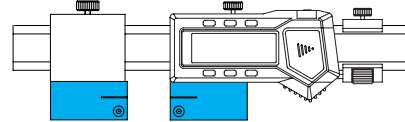

Measuring jaws (included)

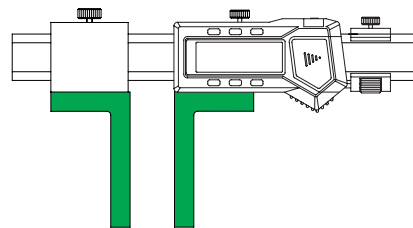

Depth stop (included)

