



# ELECTRONIC INDICATOR


DATA  
OUTPUT

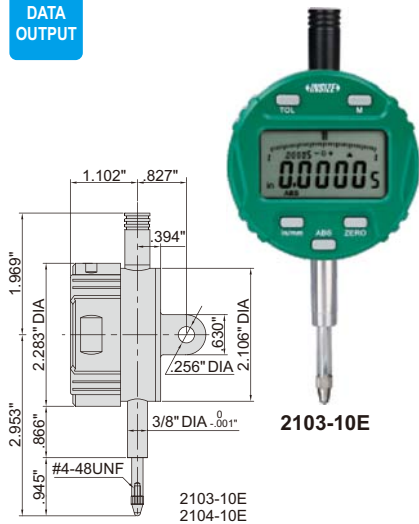

**2103-10E**

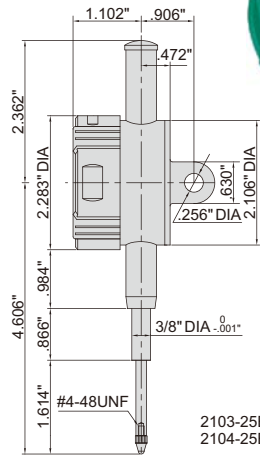


**2104-25E**

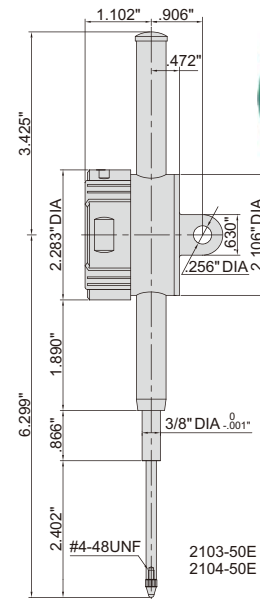

**2103-50E**

- Meet ASME B89.1.10M-2001
- Reading in digit and analog
- Display can be rotated by 320°
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./range measurement, inch/metric conversion, absolute/incremental measurement
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output system (part no. **7306-40**, **7302-SPC3A**, **7305-SPC1A**), backs (page 105), contact points (page 104)



spindle lift knob is included  
(except **2103-10E/10FE**, **2104-10E**)



Resolution .00005"/0.001mm

Part No.	Range	Accuracy	Hysteresis	Remark
<b>2103-10FE*</b>	.5"/12.7mm	±.00015"	.00005"	flat back
<b>2103-10E*</b>	.5"/12.7mm	±.00015"	.00005"	lug back
<b>2103-25E*</b>	1"/25.4mm	±.00015"	.00005"	lug back
<b>2103-50E*</b>	2"/50.8mm	±.00015"	.00005"	lug back

Resolution .0005"/0.01mm

Part No.	Range	Accuracy	Hysteresis	Remark
<b>2104-10E*</b>	.5"/12.7mm	±.0015"	.0005"	lug back
<b>2104-25E*</b>	1"/25.4mm	±.0015"	.0005"	lug back
<b>2104-50E*</b>	2"/50.8mm	±.0015"	.0005"	lug back

\* Supplied with manufacturer inspection certificate traceable to NIST