


# DIGITAL INDICATORS FOR BORE GAGE

**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST


DATA  
OUTPUT

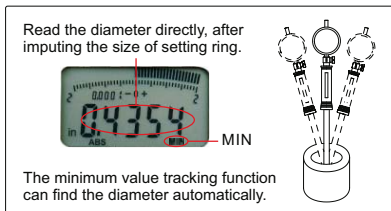

- Specially designed for bore gages
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after inputting the size of setting ring
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: minimum value tracking, calibration, data preset, inch/metric conversion, absolute/incremental measurement
- Keep preset data in memory after restart
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (part no. 7306-40, 7315-40, 7302-SPC3A, 7305-C01, 7305-SPC1A), backs (page 74), contact points (page 73), spindle lift knob (part no. 7332)



2108-10EF



analog pointer



Part No.	Range	Resolution	Accuracy	Hysteresis	Remark
2108-10EF *	.5"/12.7mm	.0005"/0.01mm	±.0015"	.0005"	flat back
2108-101EF *	.5"/12.7mm	.00005"/0.001mm	±.00015"	.00005"	flat back

\* Supplied with manufacturer inspection certificate traceable to NIST USA