

ELECTRONIC INDICATOR WITH LIFTING LEVER


DATA
OUTPUT




- Reading in digit and analog
- Display can be rotated by 320°
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (part no. **7306-40**, **7302-SPC3A**, **7305-SPC1A**), backs, contact points



2109-10E

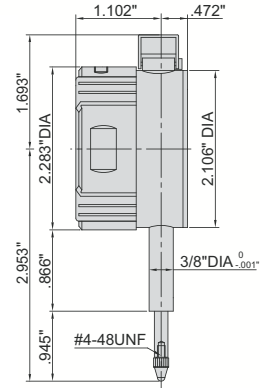

warning when over tolerance



analog pointer



Part No.	Range	Resolution	Accuracy	Hysteresis	Remark
2109-10E*	.4"/10mm	.0005"/0.01mm	±.0015"	.0005"	flat back
2109-101E*	.4"/10mm	.00005"/0.001mm	±.00015"	.00005"	flat back

* Supplied with manufacturer inspection certificate traceable to NIST USA