



TAPER GAGE

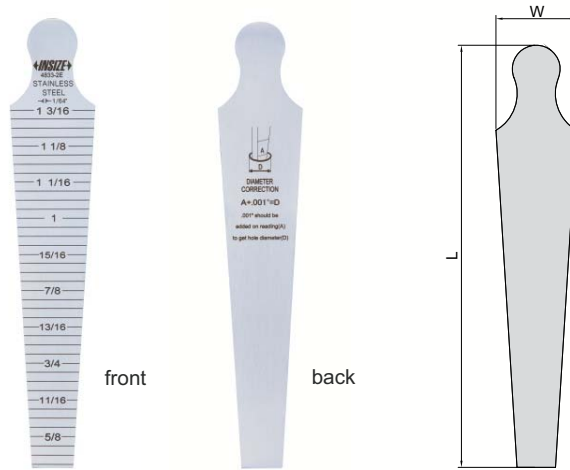


4833-2E

measure diameter of hole



When measuring diameter of holes, correction on reading is needed due to the thickness of taper gage. For example, when reading A is 5/8", diameter D is 5/8" + .001".

measure slot width



Part No.	Range	Graduation	Accuracy	L	W
4833-1E	1/32 – 5/8"	1/64"	± .004"	5.748"	.669"
4833-2E	5/8 – 1-3/16"	1/64"	± .004"	6.260"	1.197"
4833-3E	1-3/16 – 1-3/4"	1/64"	± .004"	6.535"	1.787"
4833-4E	1-3/4 – 2-3/8"	1/64"	± .004"	6.693"	2.382"

- Measure opening, slot width, hole diameter, etc.
- Diameter correction table on the back (except **4833-4E**)
- Made of stainless steel