


TORQUE WRENCHES



ATTENTION: CLOCKWISE
OPERATION ONLY



- According to DIN ISO 6789, ASME B107.300
- All-metal construction

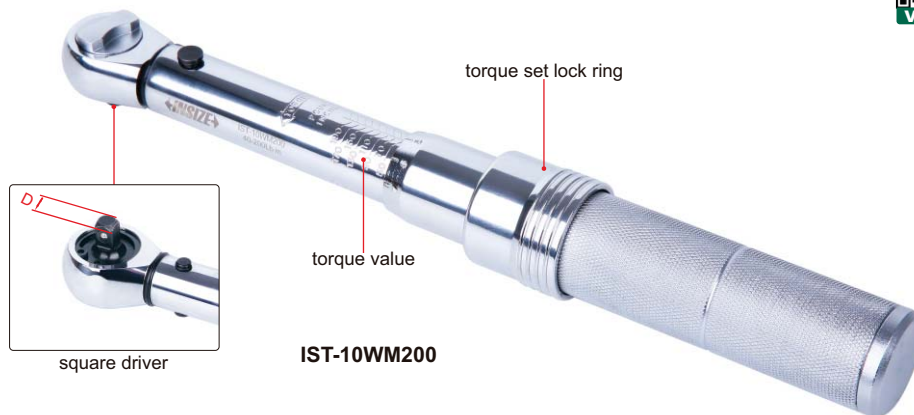

SPECIFICATION

Part No.	IST-10WM200	IST-10WM250	IST-10WM100	IST-10WM150
Range (clockwise)	40~200lb.in	50~250lb.in	20~100lb.ft	30~150lb.ft
Accuracy	±6% (<89lb.in) ±4% (≥89lb.in)	±6% (<89lb.in) ±4% (≥89lb.in)	±4%	±4%
Graduation	1lb.in	1lb.in	0.5lb.ft	1lb.ft
Square driver (D)	1/4"	3/8"	3/8"	1/2"
Length	11.02"	12.40"	16.73"	19.88"
Weight	1.50lb	1.81lb	2.29lb	2.56lb

Part No.	IST-10WM250A	IST-10WM600	IST-10WM1000	IST-10WM2000
Range (clockwise)	50~250lb.ft	100~600lb.ft	200~1000lb.ft	400~2000lb.ft
Accuracy	±4%	±4%	±4%	±4%
Graduation	1lb.ft	2.5lb.ft	5lb.ft	10lb.ft
Square driver (D)	1/2"	3/4"	1"	1"
Length	20.67"	41.54"	49.61"	49.61"
Weight	2.87lb	13.01lb	20.28lb	23.15lb