






INTERNAL SPLINE PLUG GAGES

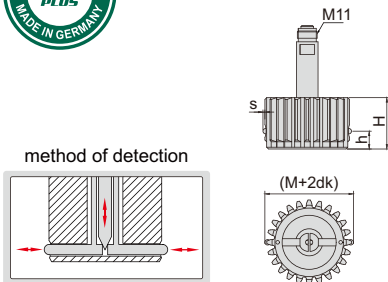

PROBE SPECIFICATION

(mm)

Range	8-15	12.1-20	20.1-40	40.1-60
Travel of point (s)	0.2	0.2	0.2	0.2
Height of point (h)	for through bores	6	10	10
	for blind bores	4	6	6
Height of sleeve (H)	for through bores	18.5	22.5	28
	for blind bores	16.5	18.5	24
Repeatability	0.002	0.002	0.002	0.002

PROBE

Code	Type
4653-A□□□□	for through spline
4653-B□□□□	for blind spline

Probe ordering examples:

Code	Type	Range
4653-A20D8 *	for through spline	20.8mm
4653-B16D6 *	for blind spline	16.6mm

* "D" stands for "."

HANDLE (OPTIONAL)


(mm)

Code	Length (L)	Retraction
4653-150	45	without
4653-1105	105	without
4653-1235	235	without
4653-H70	70	with



EXTENSION ROD FOR HANDLE (OPTIONAL)

Code	Length (H)
4653-R50	50
4653-R100	100
4653-R250	250
4653-R500	500



SETTING MASTER (OPTIONAL)

Code	Remark
4655-□□□□-SETTER	design according to probes

