

MICROMETERS WITH DIAL INDICATOR

INSIZE PLUS


ATTENTION: SETTING
STANDARDS ARE NOT INCLUDED

LIGHT
WEIGHT

digital indicator
is optional



3685-300

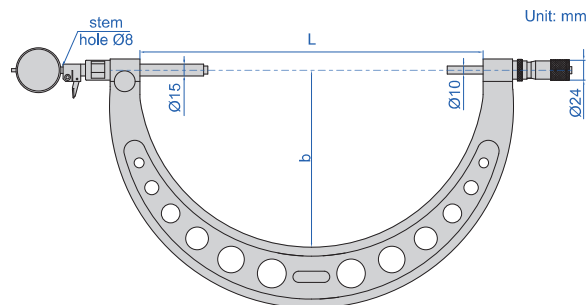

- Graduation 0.01mm
- Anvil with vernier graduation, convenient adjustment for different measuring ranges
- Meet DIN863-3
- Carbide measuring faces
- Anvil retracting range: 2.5mm
- Optional accessory: dial/digital indicators, setting standards (code 7386)

anvil with vernier graduation,
can be adjusted for different measuring ranges



Range 100mm

(mm)

Code	Range	Micrometer head accuracy	L	b	Weight
3685-300	200-300mm	6μm	320	165	1.7kg
3685-400	300-400mm	7μm	430	220	2.1kg
3685-500	400-500mm	8μm	530	273	2.6kg
3685-600	500-600mm	9μm	630	323	3.3kg
3685-700	600-700mm	9μm	730	378	4.0kg
3685-800	700-800mm	9μm	830	423	4.4kg
3685-900	800-900mm	10μm	930	473	5.2kg
3685-1000	900-1000mm	10μm	1030	520	6.4kg

Range 200mm

(mm)

Code	Range	Micrometer head accuracy	L	b	Weight
3685-402	200-400mm	7μm	430	220	2.2kg
3685-602	400-600mm	9μm	630	323	3.4kg
3685-802	600-800mm	9μm	830	423	4.5kg
3685-1002	800-1000mm	10μm	1030	520	6.5kg
3685-1202	1000-1200mm	11μm	1230	635	8.9kg
3685-1402	1200-1400mm	12μm	1430	735	11.6kg
3685-1602	1400-1600mm	18μm	1660	840	13.9kg
3685-1802	1600-1800mm	20μm	1870	940	16.5kg
3685-2002	1800-2000mm	22μm	2075	1055	19.1kg