PORTABLE AC MAGNETIC POWDER FLAW DETECTOR (PROFESSIONAL TYPE)
CODE MPI-M510

IP54
WATERPROOF

- Conformity to standards JB/T7411-2012 ASTM E709-08 ASTM E1444
  EN10228-1:1999 ISO 9934
- Light weight ergonomic design reduces operator muscle fatigue
- Magnetic pole feet of the movable joints can make good contact with any shape of parts

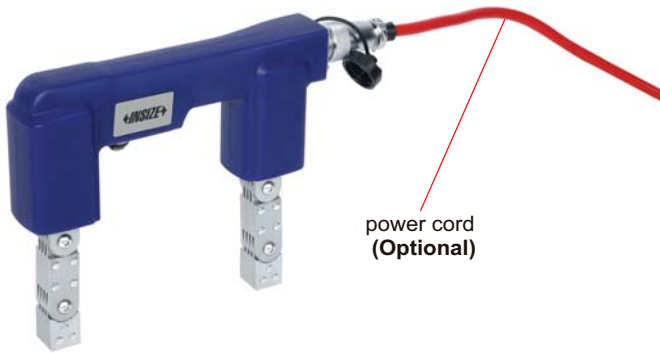

SPECIFICATION

Amps	AC 2.5A
Sensitivity	15/100 engraved groove clearly displayed on A1 standard sensitivity test piece
Duty cycle	>50% maximum excitation time 30 seconds
Lifting Power	≥4.5kg(44N)
Magnetic pole spacing	50-195mm
Power supply	AC220V, 50Hz
Operation temperature	-10-40°C
Dimension(L×W×H)	220×42×175mm
Weight	2.3kg

STANDARD DELIVERY

Main unit	1pc

OPTIONAL ACCESSORY

European power cord	**MPI-M510-P**
British power cord	**MPI-M510-K**
Brazilian power cord	**MPI-M510-B**