






- Clockwise and counter-clockwise operation
- 9 target torque values can be set, with audible and visible alarm:
 - Green LED light on and buzzer sounds when torque value
 - is 80%~99.5% of target torque

 Both green and red LED light on and buzzer sounds when torque value is over 99.5% of target torque
- Memory of 250 results, can upload to the computer
- Back with magnet
- Power off in 2 minutes automatically

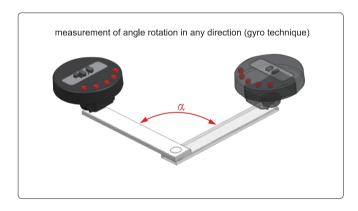

SPECIFICATION

Display range	0~999°
Setting range	1~360° (increment 1°)
Resolution	0.1°
Accuracy	±2° for 90° rotation @30°/sec
Power supply	2×1.5V AAA batteries
Dimension	58×58×41mm
Weight	70g