

DIAL TEST INDICATORS

INSPECTION
CERTIFICATE

JEWELLED
BEARING

POPULAR
MODEL





2380-05



2380-08

- Meet DIN2270 (except 2380-02, 2381-02, 2381-021)
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli

clamp (included)

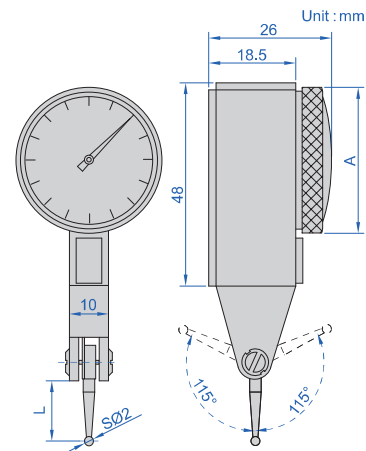

(mm)

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading	A	L
2380-05*	0.5mm	0.01mm	13µm	3µm	0-25-0	Ø30	13.5
2380-08*	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø30	13.5
2381-05*	0.5mm	0.01mm	13µm	3µm	0-25-0	Ø37	13.5
2381-08*	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø37	13.5
2380-02*	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø30	12.5
2381-02*	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø37	12.5
2381-021*	0.2mm	0.001mm	6µm	2µm	0-100-0	Ø37	12.5

* Supplied with manufacturer inspection certificate