-INSIZE-

DIGITAL TUBULAR INSIDE MICROMETERS



DATA OUTPUT


Micrometer head: 150-175mmResolution: 0.001mm/0.00005"

Accuracy: (3+n+L/50)µm
 n=number of rods
 L=maximum measuring length (mm)

- Carbide measuring faces
- Diameter of extension rods is 22mm
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Supplied with setting standards
- Power:

with data interface: CR2032

built-in wireless: rechargeable lithium battery

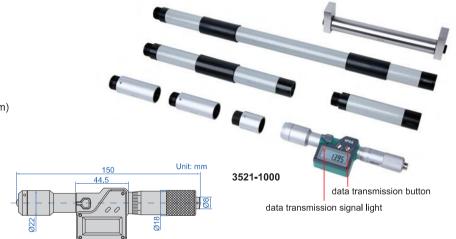

With data interface (optional data output cable: code 7315-31 receiver is needed, 7302-31)

(· p·······, · · · · · · · · · · · · · ·			
Code	Range	Travel of micrometer head	Extension rods
3521-175	150 - 175mm	25mm	_
3521-1000	150 - 1000mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm, 400mm
3521-1500	150 - 1500mm	25mm	25mm, 50mm (2 pcs), 100mm (2 pcs), 200mm, 400mm (2 pcs)
3521-2000	150 - 2000mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm (2 pcs), 400mm (3 pcs)

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code		
3521WL		

Code examples:

Original code	Wireless code
3521-175	3521-175WL
3521-1000	3521-1000WL