
ZOOM STEREO MICROSCOPES (WITH UNIVERSAL STAND)





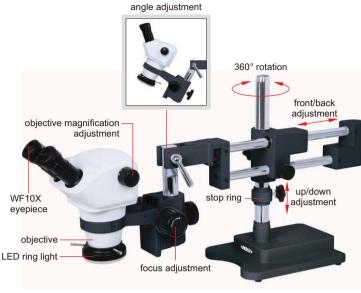

5106-M40 (with stand type A)

5106-M50 (with stand type B)

SPECIFICATION

SPECIFICATION					
Code	5106-M40	5106-M40T	5106-M50	5106-M50T	
Stand	type A		type B	type B	
Optical tube	binocular	trinocular	binocular	trinocular	
Eyepiece (wide field)	10X (view field: Ø22mm)				
Objective	0.8X~5X (zoom)				
Zoom ratio	1:6.3				
Pupil distance	55~75mm				
Diopter adjustment	±5 diopter (two eyepieces)				
Working distance of objective	115mm				
Max. workpiece height	300mm				
Illumination	adjustable reflected LED ring light				
Power supply	power adapter				
Dimension (L×W×H)	610×220×430mm 790×230×430mm				
Weight	13.7kg 20kg				

STANDARD DELIVERY

Main unit (with stand)	1 pc
WF10X eyepiece	2 pcs
LED ring light	1 pc
Anti-dust cover	1 pc

OPTIONAL ACCESSORY

Auxiliary	0.5X	ISM-ZS50-OB05X*
objective	2X	ISM-ZS50-OB2X
Eyepiece	10X dividing eyepiece (0.1mm/div.)	ISM-ZS50-EPD10X
	WF15X (view field: Ø16mm)	ISM-ZS50-EP15X
	WF20X (view field: Ø12mm)	ISM-ZS50-EP20X
Adapter sleeve		ISM-ZS30-ADAPTER
0.5X adapter (for 5106-M40T/M50T)		ISM-MAS-ADAPTER
Digital camera (for 5106-M40T/M50T) **		ISM-CM20, ISM-CM63

^{*0.5}X auxiliary objiective must be used with ISM-ZS30-ADAPTER

^{**}Digital camera must be used with 0.5X adapter ISM-MAS-ADAPTER